
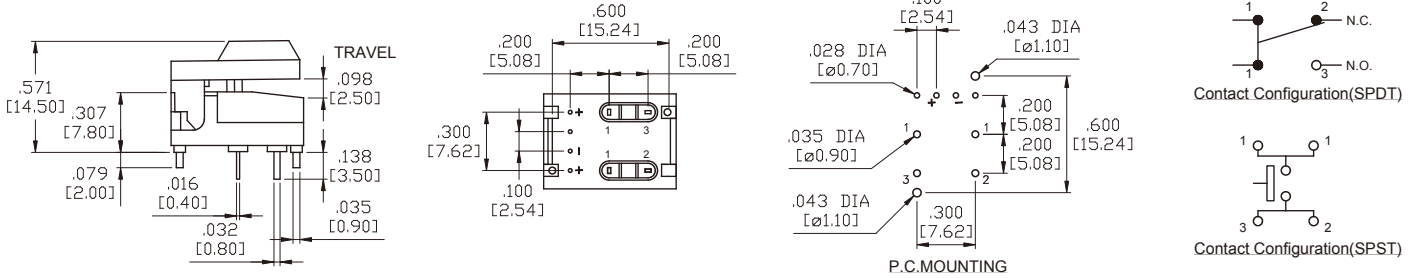


SPECIFICATIONS:

RATING: 12mA 24VDC (SPDT), 50mA 12VDC (SPST).
INITIAL CONTACT RESISTANCE: 100mΩ max. (initial).
DIELECTRIC STRENGTH: 250V AC 1 minute (Except between terminals of LED).
INSULATION RESISTANCE: 100M min.(250V DC megger).
ELECTRICAL LIFE: 100,000 operations min. (Rated voltage and current).
STATIC CAPACITY: 1.5pF max.(1MHz)
OPERATING FORCE: 170gf±50gf (SPDT), 450gf±100gf (SPST).
FUNCTION: Momentary (SPDT), tactile (SPST).
OPERATION TEMPERATURE RANGE: -10°C to +60°C

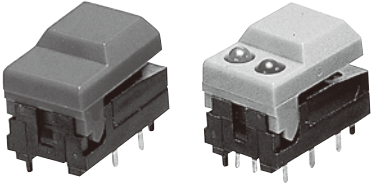

CAP STYLES

<p>A0</p>	<p>A1</p>	<p>A2</p>
<p>B0</p>	<p>B1</p>	<p>B2</p>


CAP COLORS

- 1=RED
- 6=ORANGE
- 2=YELLOW
- 7=BLUE
- 3=GREEN
- 8=BROWN
- 4=WHITE
- 9=GRAY
- 5=BLACK

LED COLORS

- LEFT: 1=RED 2=YELLOW 3=GREEN
- RIGHT: 1=RED 2=YELLOW 3=GREEN

HOW TO ORDER

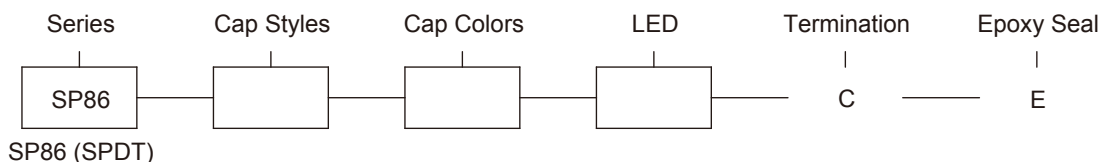

Specifications and Dimensions subject to change